





### Dimensions

#### Angular view



#### Top view

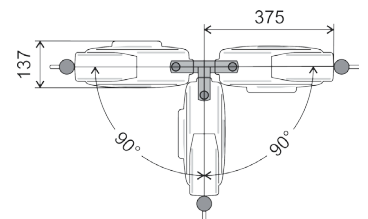

#### Installation tip for 315 Hose reel

Hose reel to be mounted on a wall, pillar or ceiling, minimum 2.5 m above the floor. Hose reel fitted with 2 pcs. screw on firm ground.

## MEDIUM workplace reel

### Features & Benefits

Casing made in shock proof PP/Polypropylene  
- suitable for tough environments

Ultra-lightweight & soft PU braided hose  
- Comfortable handling even at very low temperatures

6 meters true rollable working length  
- Store the hose completely back to the reel

Full-flow axle design

Revolving hinge with 200° rotation  
- Easy to reach your application accurately

Plastic spring protection and BSPP thread with o-ring sealing

### Optional Accessories

High-flow Coupling / Plug

Safety Coupling

### Special versions on request

For areas with low temperatures down to -30°C  
- fitted with Ultrasoft Ether based PU braided hose

10 mm ID / 9 meter hose for higher airflow



### COMPOUND REEL SERIES 315 - Versions and technical data

	Hose Length	Hose ø mm	Lead Hose	Hose Material	Temperature & Pressure	Thread In/Out	Weight	Part Number
<b>315 PU Short</b>	6 m	8 x 12	1.5 m	Ester-PU (100%)	- 20°C to +60°C 12 bar (174 psi)	1/4" - 1/4" BSPP	4.0 kg	315.0314