




Dimensions

Angular view

Top view

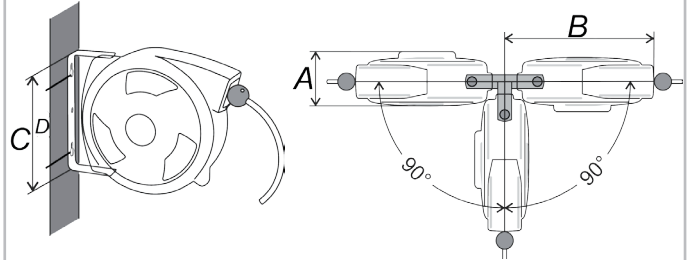

A: 195 B: 420 C: 350 D: 185 (mm)

Rules for all Cable Reels:

When operate with max. power should cable be fully unwound from the cable drum!

Never use cable that are damaged!

Cable should be fully retracted when not in service to maximize spring life!

Optional Accessories

Triple exit connector

Special versions on request

Fitted with other plug systems

Large Power cable reel 5x 2,5 mm²

Features & Benefits

400VAC - 5.000 Watt power capacity with CEE plugs
incl. phase inverter
IP 44 environment tested

Red LED Power indicator and thermo-fuse

Rubber / Neoprene cable H07RN-F
- Comfortable handling at very low temperatures

15 meters true rollable working length
- Store the hose completely back to the reel

Revolving hinge with 200° rotation
- Easy to reach your application accurately

ELECTRIC CABLE REEL SERIES 373 - Versions and technical data

| | Cable Material | Cable leads | Cable Length | Lead Cable | Temperature & Power | Plugs | IP | Weight | Part Number |
|-----------------------|---------------------------|------------------------|--------------|------------|----------------------------------|--------------|----|--------|-------------|
| 373 version EU | Rubber / Neoprene H07RN-F | 5 x2.5 mm ² | 15 m | 1 m | - 30°C to +60°C 1600 / 3200 W | Schuco F / M | 44 | 9,5 kg | 373.1000 |