



200/75 PRIME S HD 10 BAR

Cod. 100200403


Heavy duty cycle oil-free compressor, 9 cylinders, flow rate **570** l/min@8 bar, 200 l tank, without dryer. Also for continuous cycle operation.

Applications:

- Dental clinics
- Dental laboratories and CAD-CAM milling machines
- Laboratories: rheometers, viscometers, chromatography, analyzers
- Ophthalmology
- Sterilization devices
- Air breathing systems
- Cabinets for endoscopy
- Food packaging
- Beverage
- Gas productions
- Fire sprinkler systems

	€ ∞	(00(>		5		●))	Υμμ	②		kg
Air Dryer	Air capacity	FAD @ 8bar	Motor	Voltage Hz	Receiver	Noise Level	Duty Cycle	max P.	Size	net Weight
No	m³/min l/min 1.08 1080	m³/min l/mi 0.57 570	kW 6.6	400V 50/60Hz	l 200	db(A) 75	100 %	bar 10	mm 1550x600x910	Kg 173

Air delivery performance

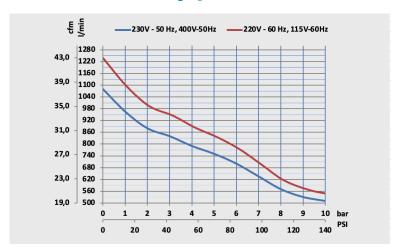

Maintenance kits

Kit. Description Type Hours



TA-FL-0011-K-SCP	TANDEM PRIME 3 + 3 + 3 S kit Ordinary maintenance kit for the PURE AIR TANDEM PRIME 3+3+3 S range (200/75 TANDEM PRIME S). Comprehends: • 9 suction filters, code: TA-FL-058-C • 1 filter cartridge, code: TA-FL-001-C-SM • 1 O-ring, code: TA-FL-001-OR • 3 non-return valve pads, cod: CO-PV-001 Replace the filtration cartridges annually.	Ordinary	1.000h/1y
PR-GC-035-K-SCP	TANDEM PRIME 3+3+3 Kit The extraordinary maintenance spare parts kit for the PRIME 3+3+3 versions (200/75 PRIME). Comprehends: • 9 suction filters, code: TA-FL-058-C • 18 O-rings, code: MA-PC018 • 9 piston rings, code: MA-MG00001 • 9 piston guide rings, code: MA-MG00003 • 9 expansion rings for the segments, code: MA-MG00024 • 9 complete valve plates, code: MA-MG-02002P-C-P • 3 non-return valve pads, cod: CO-PV-001 The recommended maintenance intervals for this compressor are 4000 hours/4 years.	Extraordinary	4.000h/4y